

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
28 December 2000 (28.12.2000)

PCT

(10) International Publication Number
WO 00/78159 A1

(51) International Patent Classification⁷: A23G 9/26, 3/02, 7/00

(21) International Application Number: PCT/DK00/00318

(22) International Filing Date: 14 June 2000 (14.06.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PA 1999 00875 18 June 1999 (18.06.1999) DK

(71) Applicant (for all designated States except US): GRAM A/S [DK/DK]; Aage Grams Vej 1, DK-6500 Vojens (DK).

(72) Inventor; and

(75) Inventor/Applicant (for US only): RUD, Mogens [DK/DK]; Knudsgade 5, 2.th., DK-6700 Esbjerg (DK).

(74) Agent: PATRADE A/S, Aaboulevarden 21, DK-8000 Aarhus C (DK).

(81) Designated States (national): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KR (utility model), KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.



(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SHAPING CONFECTIONERY PRODUCTS BY HORIZONTAL EXTRUSION

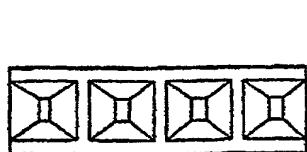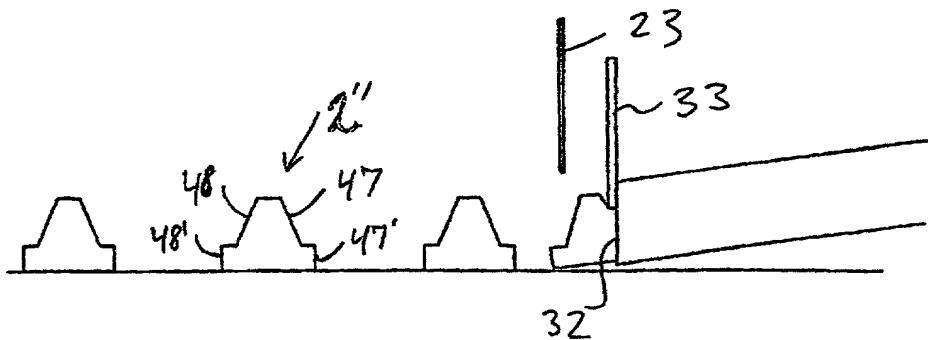

WO 00/78159 A1

(57) Abstract: Confectionery products (1) are extruded and imparted a three-dimensional shape. The nozzle outlet (32) is profiled, and a shaping plate (33) shapes the product in direction transverse to the direction of extrusion (10). Hence it becomes possible to make a spatial and three-dimensional shape by extrusion.